


KK-H

Chain Conveyors

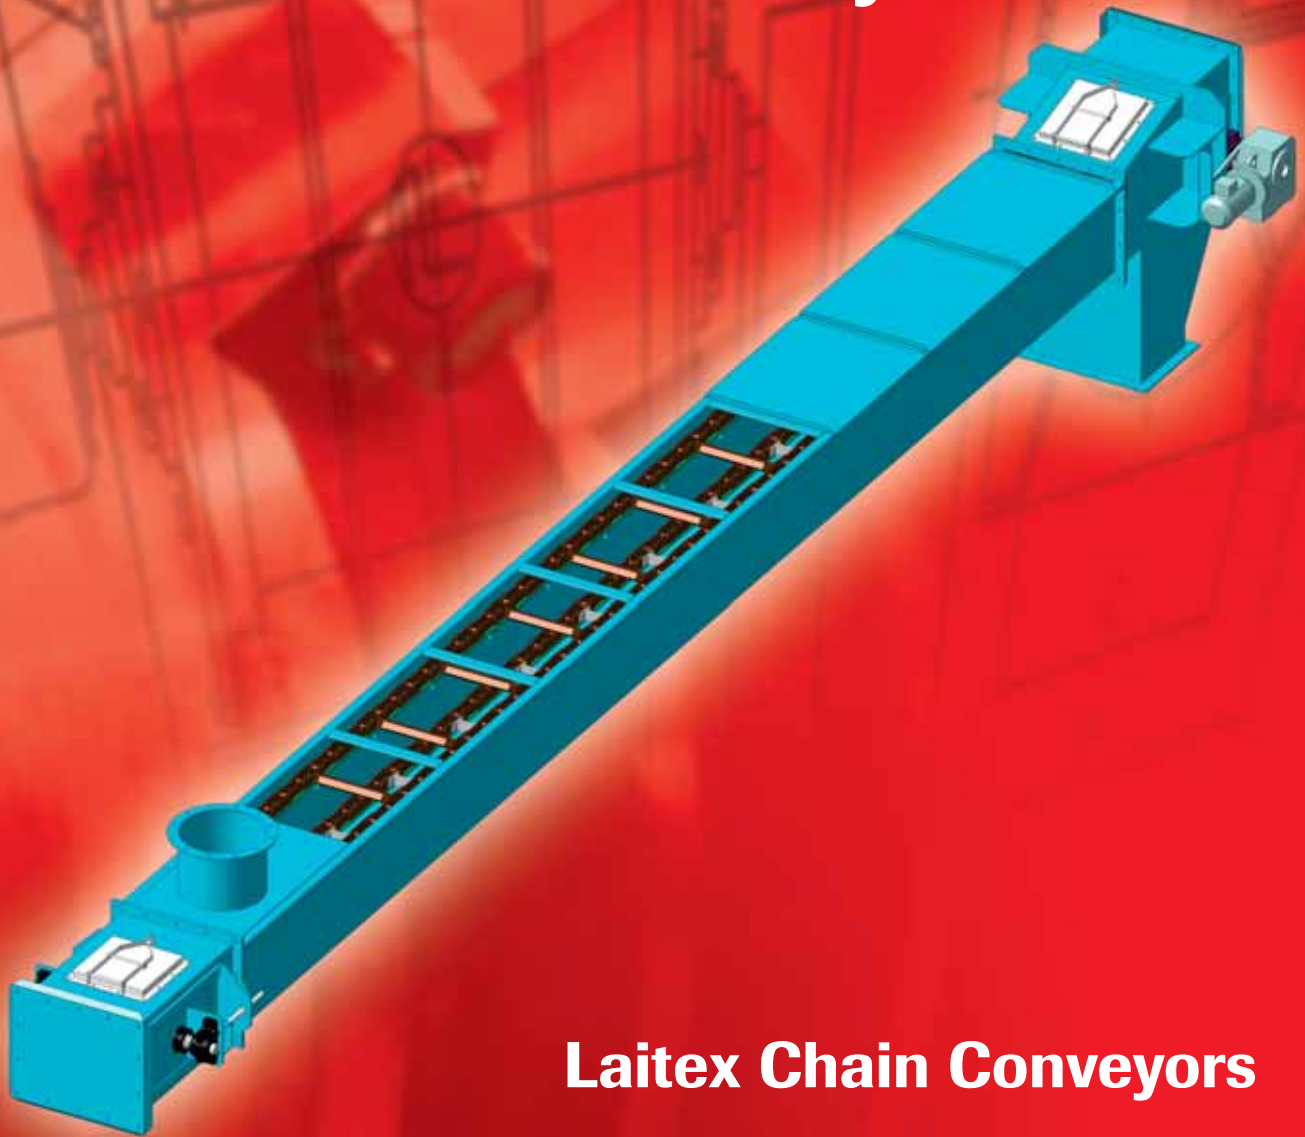


**Laitex Chain Conveyors
are reliable and secure in operation,
need of service and maintenance is low.**

KK-H Chain Conveyors



Applications for instance: Solid fuel handling and wood processing etc.

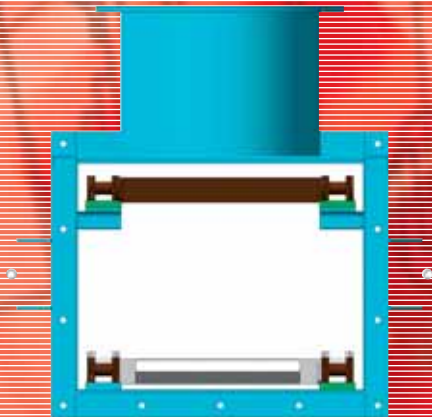

A-A (1:5)

Capacity values are calculated with chain speed 0,2 m/s.

Final chain type is chosen depending on needed chain strength corresponding to speed suitable for the application and material characteristics.

width mm	capacity m ³ /h
600	80
800	110
1000	140
1200	160
1400	190
1600	220

Technical information:

Chain types:	M160-A-200, M224-A-200, M315-A-200, M450-A-200 According to norm. DIN 8167
Material:	Carbon steel, heat resistant steel, different stainless -and acid-proof steels
Drive unit:	Hollowshaft gear motor or gear motor with open chain transmission with shear pin
Wear guide:	Wear resistant steel or synthetic resin Stuffing boxes with cords at shaft lead-throughs: stuffing air or crease as option bolted covers Hinged maintenance doors up-right position bearings
Auxiliaries:	LAITEX SC-10, 0-speed switch Blockage sensor Drive sprocket with changeable tooth rims



LAITEX OY
Yhteistyökatu 13
FIN-53300 LAPPEENRANTA
Tel. + 358 20 161 3300
Fax. + 358 20 161 3350
Email: sales@laitex.fi
Web pages: www.laitex.fi