




RK

Screw Conveyors

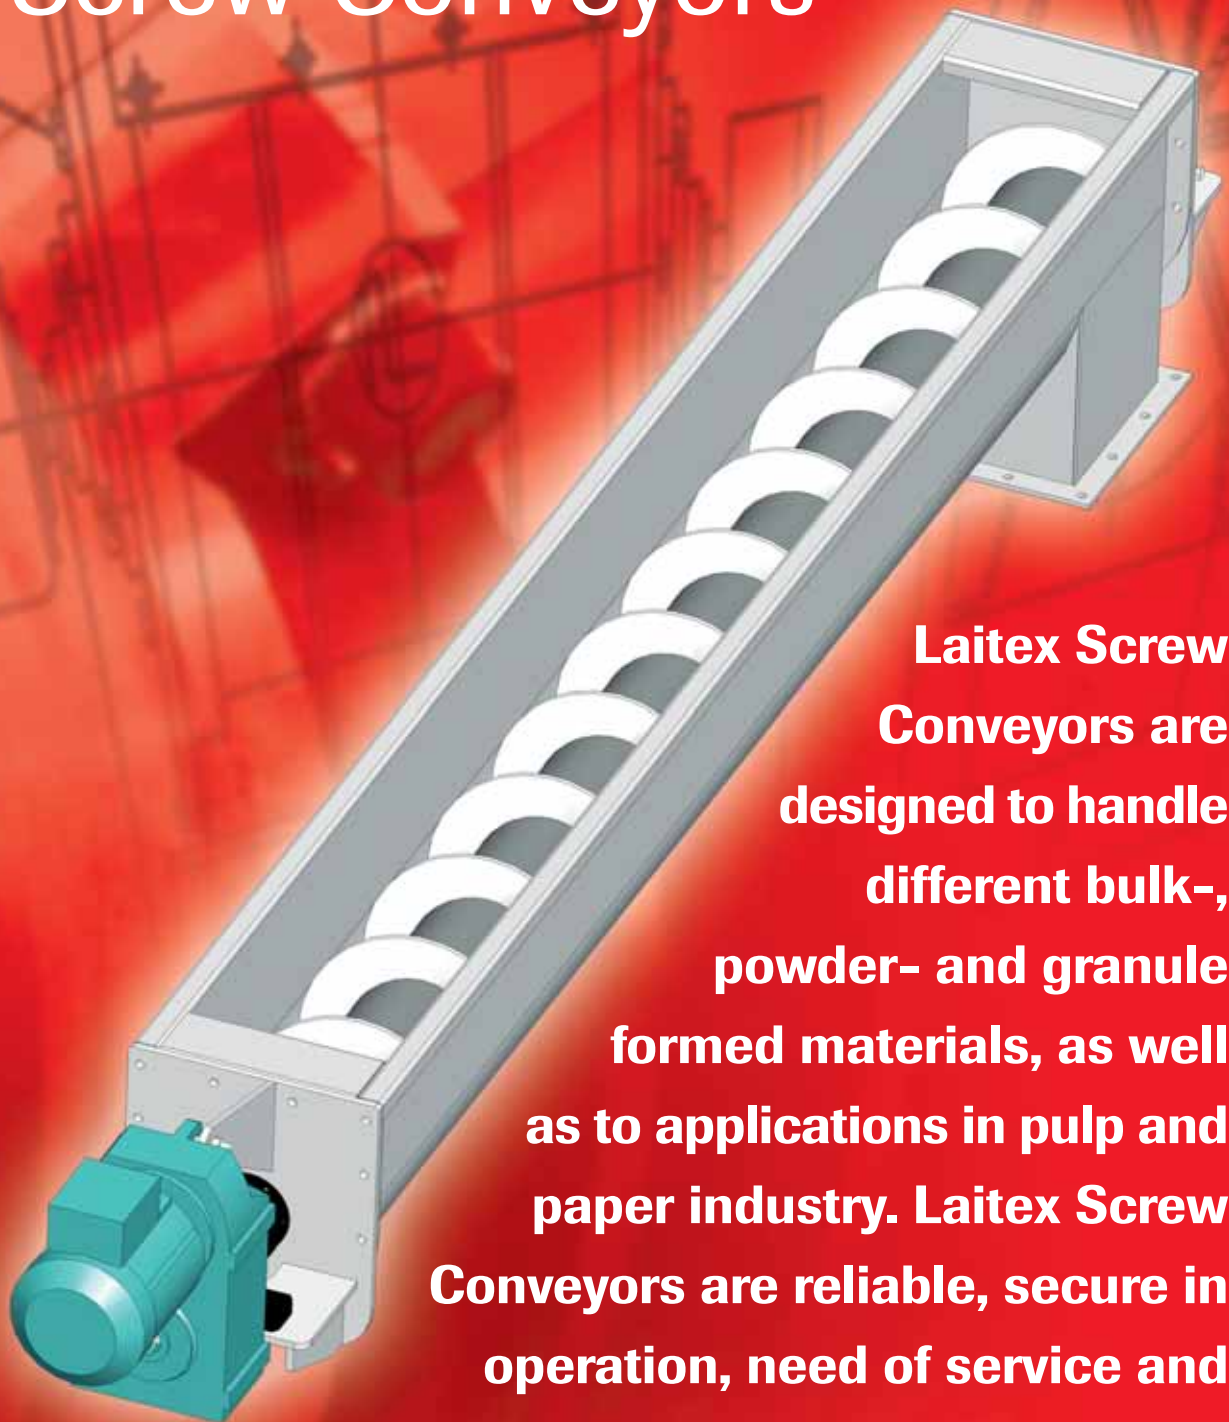

Laitex Screw Conveyors are designed to handle different bulk-, powder- and granule formed materials, as well as to applications in pulp and paper industry. Laitex Screw Conveyors are reliable, secure in operation, need of service and maintenance is low.

RK - Screw Conveyors

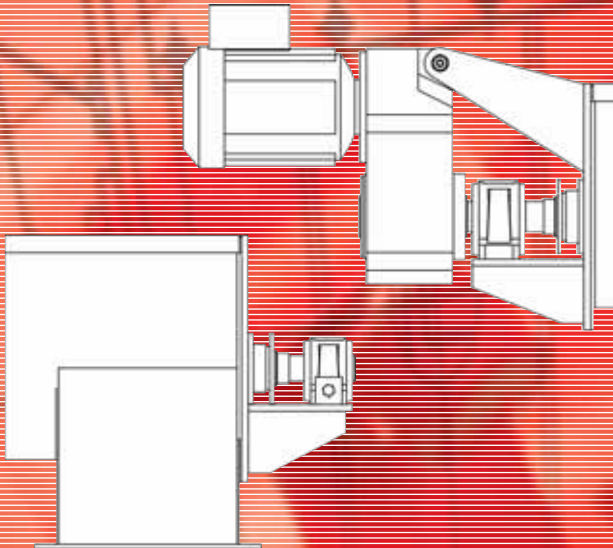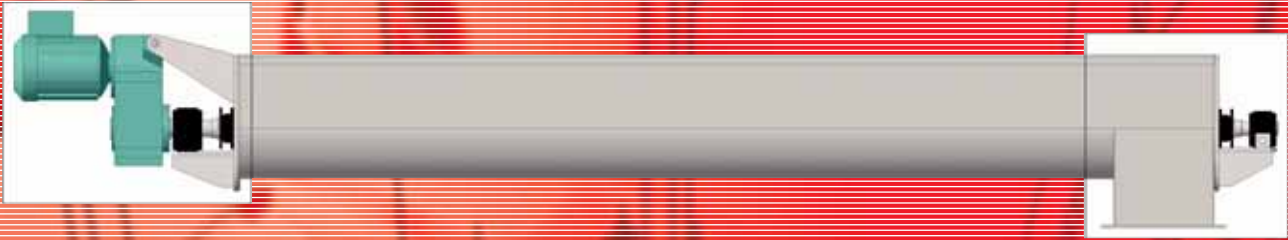

width mm	capacity m ³ /h	dia. of center pipe mm	length max. mm
315	25	168,3	6 000
400	50	219,1	7 500
500	90	273,0	8 500
630	175	323,9	9 000
800	350	406,4	10 000
1000	700	508,0	11 000

Capacity values are calculated with rotation of 25 rpm and having filling grade of 100 %. Final rotation is chosen based on the material characteristics.

Other sizes are made on request.

Technical information:

	Laitex Screw Conveyors are designed depend on customer needs and requirements from application.
Material:	Carbon steel, heat resistant steel, different stainless -and acid-proof steels
Drive:	Hollwshaft gear motor or according to agreement
	Stuffing boxes with cords at shaft lead-throughs: stuffing air or crease as option bolted covers Hinged maintenance doors Up-right position bearings
Auxiliaries:	LAITEX SC-10, 0-speed switch Blockage sensor
Special applications:	Cooling screw conveyor Screw classifier Screw discharger Screw humidifier Etc.



LAITEX OY
 Yhteistyökatu 13
 FIN-53300 LAPPEENRANTA
 Tel. + 358 20 161 3300
 Fax. + 358 20 161 3350
 Email: sales@laitex.fi
 Web pages: www.laitex.fi